



A Subsidiary of Garland Industries


Thermal Drain™ System

DESCRIPTION

The ThermalDrain™ System is a two-layer waterproofing system consisting of spray-applied BoneDry™ WPT waterproofing membrane, ThermalDrain and the DrainMax™ foundation drain. BoneDry™ WPT stops the water, ThermalDrain provides drainage, and DrainMax takes it away. See the BoneDry™ WPT, ThermalDrain and DrainMax specification sheets for more information on the individual components of this system.

USES

The ThermalDrain System is recommended for use on any below-grade waterproofing where hydrostatic pressure or rough backfill may be a concern. The ThermalDrain System is recommended for use on CMU, precast, poured-in-place, below-grade walls, and anywhere else a seamless waterproof barrier with drainage is required.

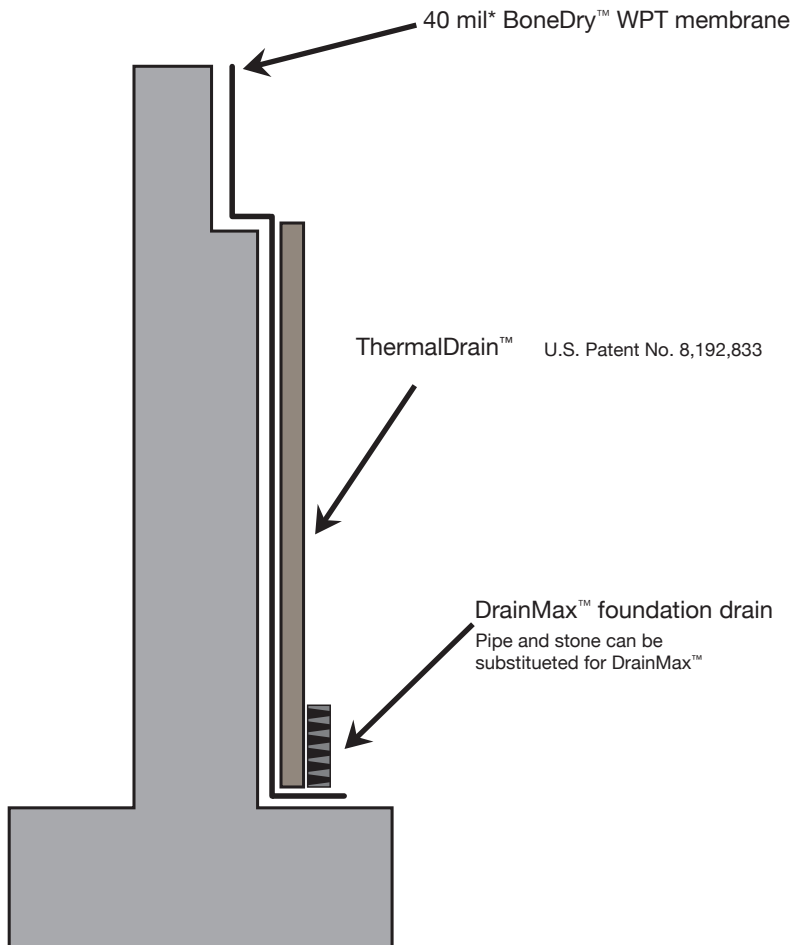

*Minimum of 40 mil

The information and recommendations discussed in this publication are believed to be correct. The ASTM testing is conducted by an independent accredited laboratory. No statement should be construed as a recommendation for any use, which would violate any patent rights. This document is not a guarantee of a warranty, if approved by GMX, Inc., a performance warranty may be granted.